

Complete Fixture consists of Reflector Trim & Frame-In Kit. Select each separately.

Reflector Trim	Frame-In Kit — See Individual Frame-In Kit Specification Sheets							
	Incandescent				Fluorescent			
	Frame-In Kit	Installation Type	Lamping	Height	Frame-In Kit	Installation Type	Lamping	Height
1076 Matte Black	1002P1	Non-IC	60W A19 75W PAR30* 75W BR30	6 3/4"	1001F13U Series	UniFrame™ Non-IC	(1) Triple 13W (GX24q-1)	5 7/8"
1076WH Gloss White	1003R	Non-IC Remodeler	60W A19 75W PAR30* 85W BR30	6 3/4"	1001F18U Series	UniFrame™ Non-IC	(1) Triple 18W (GX24q-2)	5 7/8"
	1000IC 1000AICM	IC IC AirSeal®	40W A19 75W PAR30	7 5/16" 7 5/16"	1004F13 Series	IC	(1) Quad/Triple 13W (GX24q-2)	7 1/2"
	1004ICX/N	IC AirSeal®	40W A19 75W PAR30* 65W BR30	7 1/4"	1004F18** Series	IC	(1) Quad/Triple 18W (GX24q-2)	7 1/2"
	1004IC/N 1004ICR	IC IC Remodeler	50W PAR30 60W BR30	7 1/2" 7 1/2"	1004F26** Series	IC	(1) Quad/Triple 26W (GX24q-2)	7 1/2"
	1004IC/N 1004ICR	Non-IC Non-IC Remodeler	65W BR30 50W PAR30 40W A19	7 1/2" 7 1/2"	1001F13ICU/N	Performance IC	(1) Triple 13W (GX24q-1)	7 1/4"
	1004SIC/N 1004SICR	IC IC Remodeler	50W PAR30* 60W BR30	5 1/2" 5 1/2"	1001F18ICU/N	Performance IC	(1) Triple 18W (GX24q-2)	7 1/4"
	1004SIC/N 1004SICR	Non-IC Non-IC Remodeler	75W PAR30* 75W BR30	5 1/2" 5 1/2"	*(Use Socket Extender with Short Neck) **Lightolier recommends the use of triple tube lamps			

Features

- Reflector:** Hydroformed aluminum, .040" thick (18 ga.): non-yellowing, scratch resistant Perma White finish, 88% reflectance; white trim flange.
- Step Baffle:** Molded high heat plastic with stepped conical surface for low brightness, matte black or gloss white finish.
- Frame-In Kit:** (1002P1 standard frame shown). Other frames listed above and shown on the right. See Frame-In Kit specification sheets for more details.

Options & Accessories


- Medium-Base PAR30** **1968** - For use w/short neck PAR30 lamps in P1 and Lytening housings.
- Socket Extender:**

Labels

UL (Suitable for Damp Locations), I.B.E.W.


Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
 We reserve the right to change details of design, materials and finish.
 www.lightolier.com © 2008 Philips Group • E0508

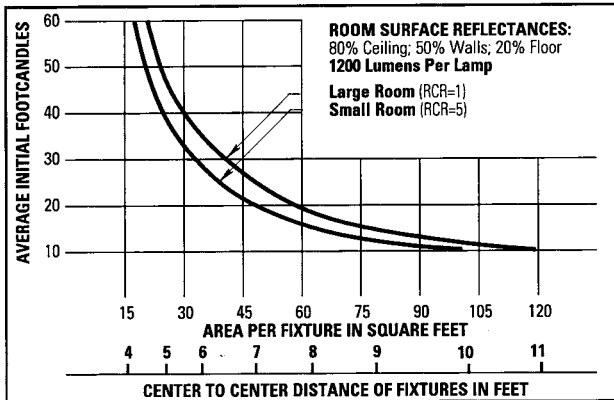

Use quick calculator chart to determine the spacing of 75 Watt PAR30 FL units (Black) for a desired level of illumination. Conversion Factors: 75W PAR30 FL, White, F.C. x 1.1.

SPACING RATIO = 0.7

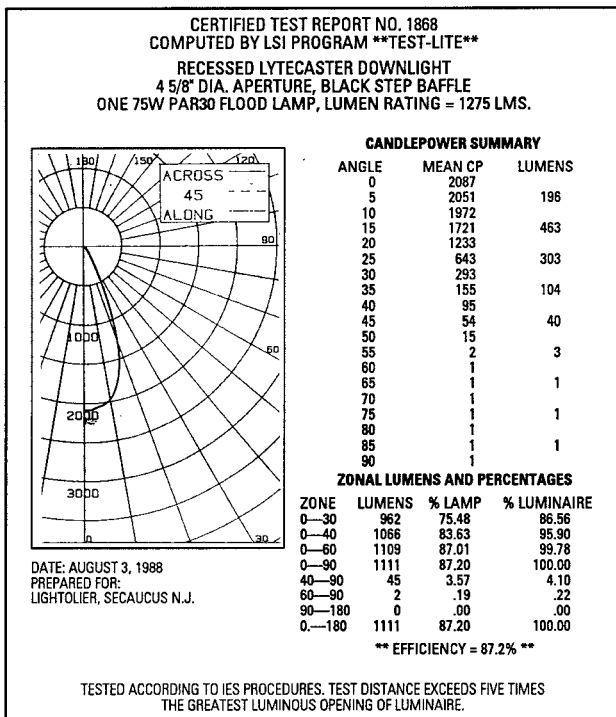

Conversion Factor: 75W PAR30 FL; White, C.U. x 1.1 65W BR30 FL; Black, C.U. x .75; White, C.U. x 1.0.

To convert lighting data for a lower wattage incandescent lamp of the same type, multiply the footcandle (or candlepower) values by the ratio of the lumens of the two lamps. The coefficients of utilization remain the same.

Job Information **Type:**

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
www.lightolier.com © 2008 Philips Group • E0508